




- ③ Provide 24*10/100/1000Base-T RJ45 ports.
- ③ Support 6KV surge protection for port and power supply.
- ③ Support 56G switch fabric and 9K jumbo frame.
- ③ Support 5 operating modes (Standard, SAG&LP, VLAN, LOCK, ISOL)
- ③ Support powered by PoE (port 24) or AC power.
- ③ Plug and play, 13" housing, desktop & rack-mount design.




Overview

UTP3-GSW24, 24 ports full gigabit unmanaged metal Ethernet switch, is special designed for security industry. It provides 24*10/100/1000Base-T RJ45 ports, equipped with 6KV surge immunity and can protect the device from the damage by direct lightning and keep the stable transmission. Unique 5 operating modes, including Standard, SAG&LP, VLAN, LOCK, ISOL, it ensures the reliability of data transmission. The UTP3-GSW24 is widely used in security video monitoring and network engineering etc.


Application

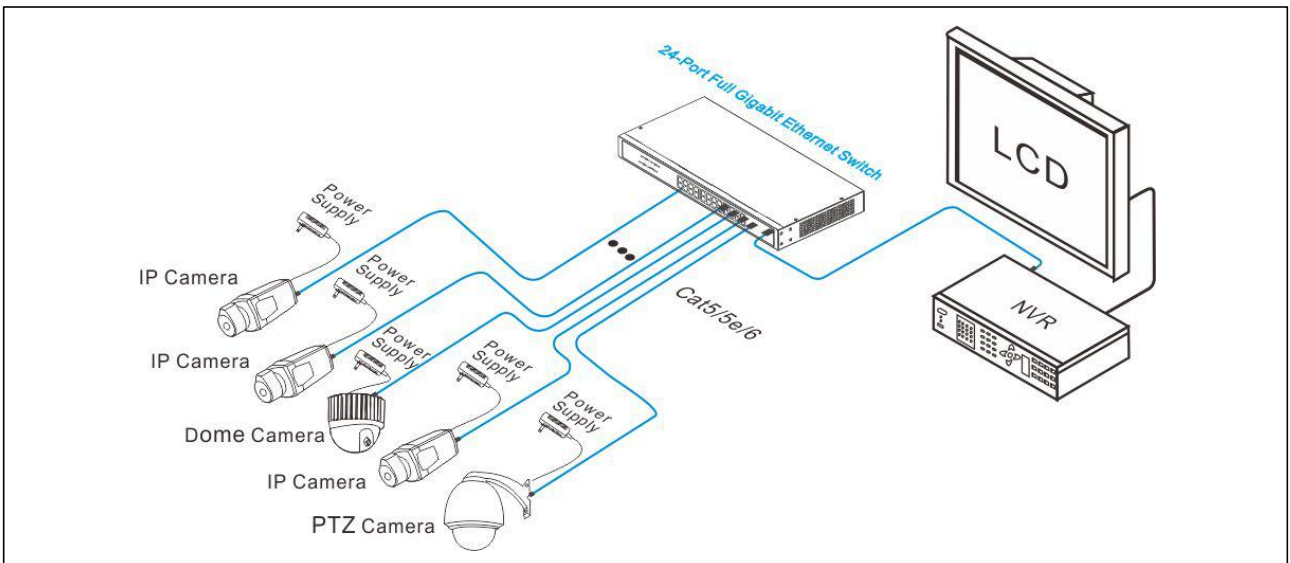

Dimension

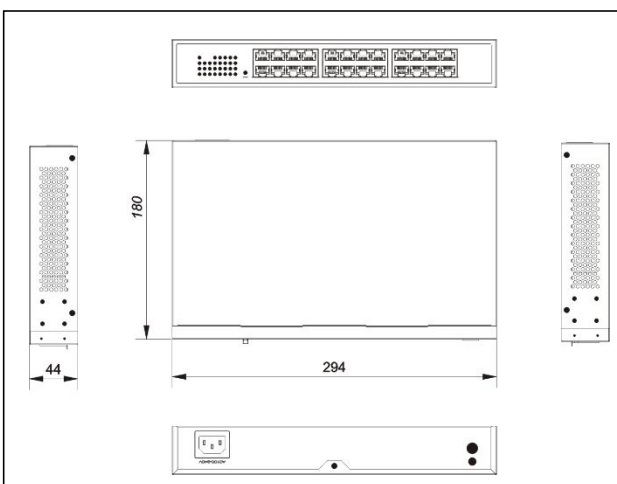

Board Diagram

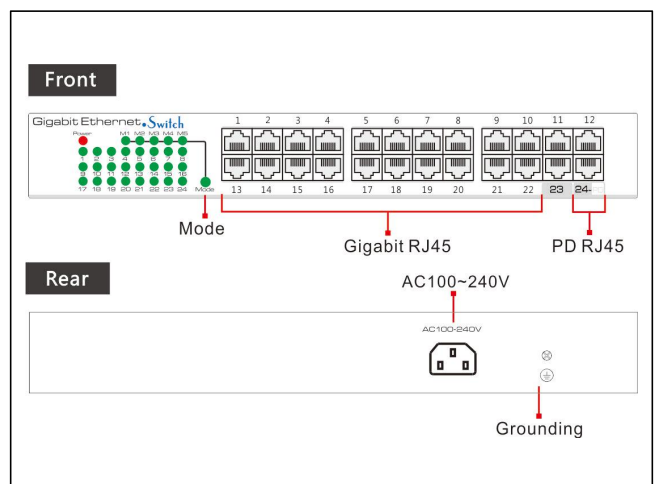

Specification

Mode	UTP3-GSW24
Interface	24个 10/100/1000Base-T Ethernet ports
Protocol	IEEE 802.3 , IEEE 802.3 i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x, 802.3ab, IEEE 802.3af
Switch Fabric	56Gbps
Interface Cache	2.5M
MAC Address Table	8K
Indicator	1-24: Link/Act , connecting (ON), transmitting (Blink), linkage fault (OFF) M1-5: Enable corresponding operating mode (ON), Disable (OFF) Power: normal (ON), fault (OFF)
Operating Mode	<p>M1(STANDARD): Disable flow control of all ports, which is suitable for low-speed & non-disk networking such as cloud course & cloud desktop.</p> <p>M2(SAG & LP): All ports support automatic detection and block for loop links, and the last two ports could be an aggregation group. The mode is suitable for engineering fields such as video monitoring, requiring high bandwidth and reliability</p> <p>M3(VLAN): Port 1 to 22 are isolated respectively, but can communicate with Port 23 and 24, preventing the system from IP address conflict.</p> <p>M4(LOCK): Limit MAC learning (only single address is allowed to single port) and mark the port with 'lock' status, preventing the ARP attack.</p> <p>M5(ISOL): Isolation between Port 1-12 and Port 13-24, which can be used for isolation of monitoring system and office network, to ensure the security of network data.</p>
Surge Protection (Port)	6KV, IEC61000-4-8
Surge Protection (Power Supply)	6KV common mode , 4KV different mode. IEC61000-4-8
ESD Protection	Contact discharge 6KV, air discharge 8KV. IEC61000-4-2
Input Power	100-240V ~ 50/60Hz or IEEE802.3af PoE (Port 24)
Operation Temperature	0°C~40°C
Storage Temperature	-40°C~88°C
Operation Humidity	8%-98% (Non-condensing)
Dimension (L*W*H)	274*180*44mm (L*W*H)
Certification	CE, FCC, RoHS

Packing List

ITEM	QTY
Ethernet Switch	1 pc
Power Cable	1 pc
User Manual	1 pc

Related Product

NAME	MODEL
8 Ports Full Gigabit Unmanaged Mental Ethernet Switch	SG8-M
16 Ports Full Gigabit Unmanaged Mental Ethernet Switch	UTP3-GSW16