

UTP3-SW08-FP120




- Major ports: 1*100Mbps up link fiber port, 8*100Mbps down link Ethernet port;
- Special Function One Key CCTV Mode: Support VLAN and restrain network storm; 1~8 downlink ports can only communicate with uplink ports; the further transmission distance up to 250m in CCTV mode with the transmission speed rate 10Mbps;
- Standard: IEEE802.3, IEEE802.3u, IEEE802.3 af, IEEE802.3at;
- Protection: Superior lightning protection (6KV), ESD protection and anti-interference ability;
- Structure: stable and delicate, easy to install;
- Operation: plug and play, no any settings needed.




Introduction

8 ports PoE Ethernet Switch is a security surveillance Ethernet Switch which aims at Ethernet high definition surveillance and Ethernet project security system. The product fully combines the characteristics of security surveillance, provides fast packet forwarding ability and abundant backplane bandwidth, which ensures clear image and fluent transmission. Inserted static, surge protection circuit can improve product stability. The product supports one key CCTV model, can achieve VLAN, QoS priority after configuration, control the Net storm, protect the information security, prevent the viral transmission and Ethernet attack, fully satisfy the Ethernet video security surveillance system and Ethernet project needs.


Application

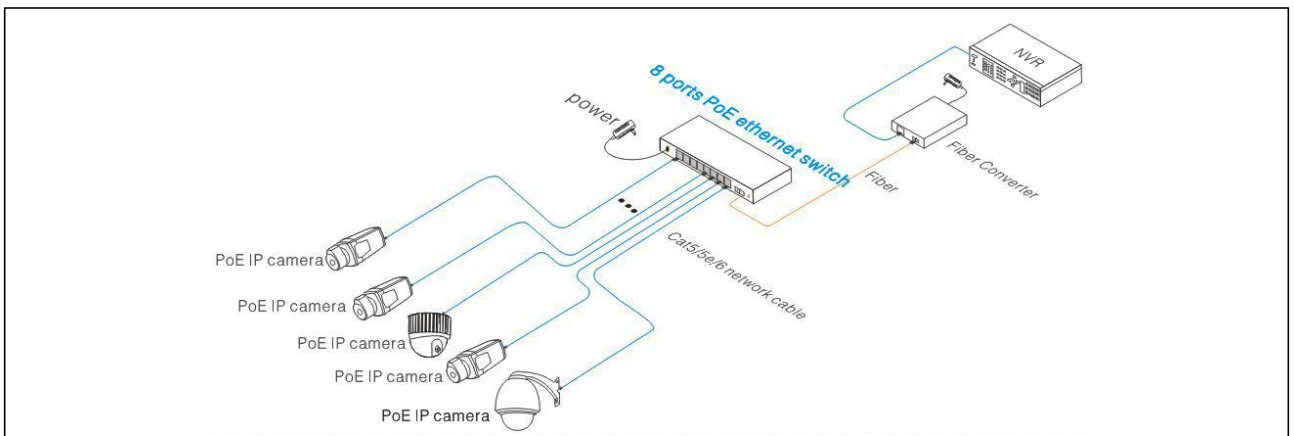

Physical Features

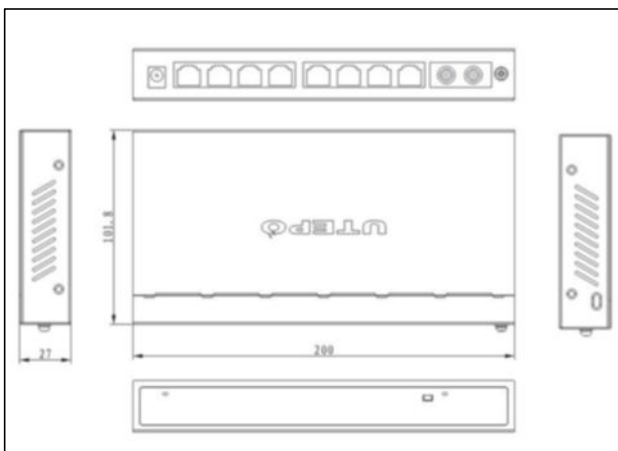

Interface drawing

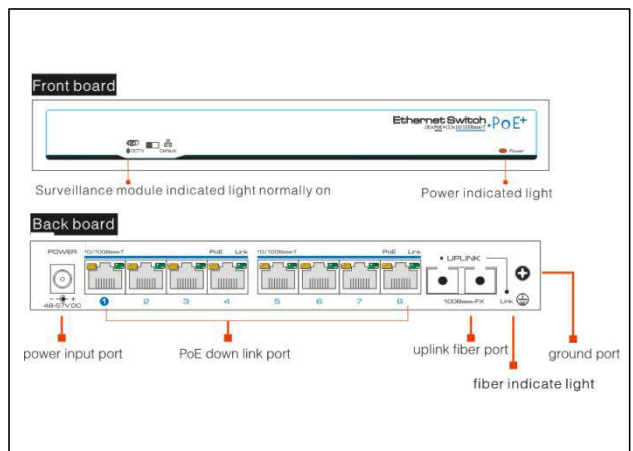

Specification

Model	UTP3-SW08-FP120
Downstream Ports	8*10/100Base-TX (PoE)
Uplink Ports	1*10/100Base-FX/SC , Single mode of double fiber
Network Standard	IEEE802.3 、IEEE802.3u、IEEE802.3X
Switch Capacity	1.8Gbps
Throughput	1.34Mpps
Switch Processing Scheme	Store and Forward
Memory Buffer	768K
MAC Table	2K
PoE Standard	802.3af/at(PSE)
PsE Type	End-span
Power Pin Assignment	1/2(+), 3/6(-)
PoE Power Output	54V DC , 30 watts max
PoE Budge	120 watts max
Lightning protection	6KV Execute : IEC61000-4-5
ESD	6KV Contact discharge 8KV Air discharge Execute : IEC61000-4-2
Power Supply	DC 48V~57V
Power Dissipation	<5W
Work temperature	-10°C~55°C
Storage temperature	-40°C~85°C
Humidity(Non-condensin)	5%-95%
Dimension (L×W×H)	200mm×101.8mm×27mm
Weight	500g
Regulator	CE、FCC、ROHS

Package List

Designation	Quantity
UTP3-SW08-FP120	1
Power Adapter	1
Accessory	1
User Manual	1

Related Products

Designation	Model
4 Ports Fast PoE Switch	UTP3-SW04-FP60
8 Ports Fast PoE Switch	UTP3-SW08-TP120-A1