

Overview

This series contains the following types:

- UTP3310-PSB: 8-Port Gigabit PoE+ 2 Port Gigabit RJ45 unmanaged Ethernet Switch
- UTP3310TS-PSB: 8-Port Gigabit PoE+ 1-Port Gigabit RJ45 1-Port Gigabit SFP unmanaged Ethernet Switch

UTP3310-PSB provides 8*10/100/1000Mbps RJ-45 Ethernet ports, 2*10/100/1000Mbps RJ-45 uplink Ethernet ports. UTP3310TS-PSB provides 8*10/100/1000Mbps RJ-45 Ethernet ports, 1*10/100/1000Mbps RJ-45 and 1*1000Mbps SFP uplink Ethernet ports. All downlink RJ-45 ports support Power-over-Ethernet (PoE), and deliver up to 45W power per port. It meets IEEE 802.3af/at standard.

The switch supports 2 working modes through DIP switch: Default and VLAN. It can be widely used in video security monitoring systems, network projects, etc.

Features and Highlights

Abundant Interfaces

- UTP3310-PSB: 8*10/100/1000BASE-T PoE+ RJ-45(Auto MDI/MDIX)
2*10/100/1000BASE-T RJ-45(Auto MDI/MDIX)
- UTP3310TS-PSB: 8*10/100/1000BASE-T PoE+ RJ-45(Auto MDI/MDIX)
1*10/100/1000BASE-T RJ-45(Auto MDI/MDIX)
1*1000BASE-X SFP

One-key Smart Mode

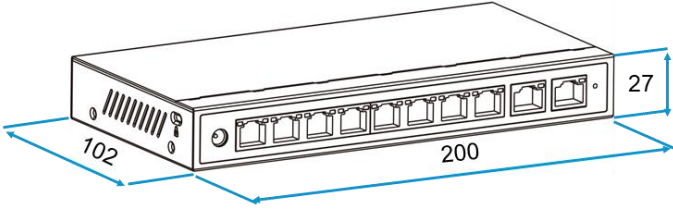
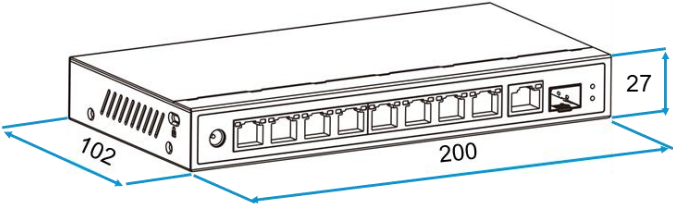
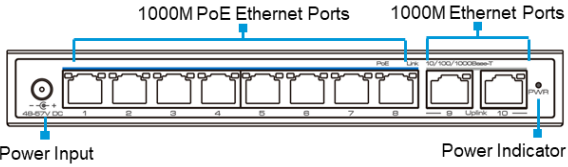
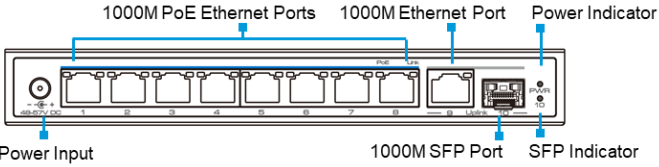
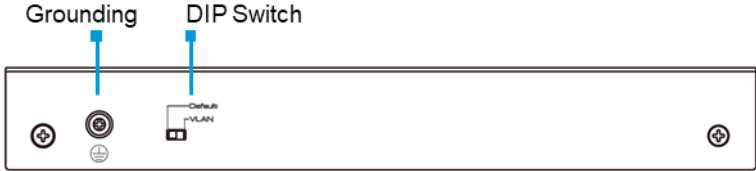
- Default: All ports are free to communicate, transmission distance: 0~100m.
- VLAN: Downlink ports are isolated from each other, but can communicate with uplink ports.



Specifications

Item	UTP3310-PSB	UTP3310TS-PSB
Hardware Specifications		
Downlink Ports	8*10/100/1000BASE-T PoE+ RJ-45(Auto-MDI/MDI-X)	
Uplink Ports	2*10/100/1000BASE-T RJ-45(Auto-MDI/MDI-X)	1*10/100/1000BASE-T RJ-45(Auto-MDI/MDI-X) 1*1000BASE-X SFP
LED Indicators	1*PWR, power indicator	
	10*Link, port indicators	
	8*PoE, PoE indicators	
DIP Switch	Default: all ports are free to communicate, transmission distance: 0~100m. VLAN: downlink ports are isolated from each other, but can communicate with uplink ports.	
Input Voltage	48~57V DC	
Power Consumption	≤125W (Full load including PoE)	
Dimensions (W*D*H)	200*102*27mm	
Net Weight	0.5kg	
Installation	Desktop/Wall mounted	
Material	Metal shell	
Color	Black	
Switch Property		
Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x, IEEE 802.3af, IEEE 802.3at	
Forwarding Modes	Store and Forward	
MAC Table	4k, support auto learning	
Switching Capacity	20Gbps/non-blocking	
Packet Forwarding Rate	14.88Mpps	
Buffer	1M	
Jumbo Frame	9K	
Power Supply		
PoE Standard	IEEE 802.3af/at	
PoE Power Supply Type	End-span	
PoE Pin Assignment	1/2 (+), 3/6 (-)	
PoE Budget	45W max for each port, 120W max for whole switch	
Reliability		
ESD	IEC61000-4-2, Level 3: Contact Discharge: ±6kV, Air Discharge: ±8kV	
Surge	IEC61000-4-5, line to earth: 6kV	
Operating	-10°C~45°C, 5%~95% (Non-condensation)	
Storage	-40°C~85°C, 5%~95% (Non-condensation)	

Appearances and Dimensions

Item	
<p>UTP3310-PSB Dimensions(mm)</p> 	<p>UTP3310TS-PSB Dimensions(mm)</p> 
<p>UTP3310-PSB Front Panel</p> 	<p>UTP3310TS-PSB Front Panel</p> 
<p>Rear Panel</p> 	

Packing List

Welcome to order our products. After purchasing, you will receive:

Item	Quantity
Switch	1 pc
Power Adapter	1 pc
Mounting Accessory	1 set
Quick Installation Guide	1 pc

More Information

For more information, please visit:

www.utepo.net

SHENZHEN UTEPO TECH LTD.

C2301,Block BC,Union R&D Center, Longteng Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-83898016-863 or +86-1501-2669-765 (Sales)

Email: info@utepo.net (Sales), support@utepo.net (Technical support)

©2024 SHENZHEN UTEPO TECH LTD. All Rights Reserved.

Version, V1.2, updated 2024-03-04.

The information in this document is subject to change without notice.

Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.