

UTP101P-HD3




- Passive, no power required;
- Plug-and-play; Real-time and stable HDCVI/HDTV/AHD/Analog transmission result;
- 500m matches the passive transceiver; 650m matches active transceiver;
- Excellent anti-interference , surge protection, ESD and lightning protection capability;
- ABS (Acrylonitrile-Butadiene-Styrene) shell; built-in extended coaxial cable, convenient for intensive engineering projects;
- Bayonet Nut Connector (BNC); Screw UTP terminal.



Specification

Item	UTP101P-HD3
Video Port	1 channel
Recommend Transmission Distance (with passive product)	HDCVI -720P:400m;1080P:350m; 400W(4MP):250m;800W(8MP):200m HDTV -1080P:300m;4MP:200m; 8MP:150m AHD -720P: 400m; 1080P:400m 400W(4MP): 270m;500W(5MP): 150m; 8MP: 200m Analog Video :500m;
Coaxial Video Port	Male BNC Port
Twisted-pair Video Port	2-channel screw terminal
Video Compatibility	HDCVI/HDTV/AHD/Analog, PAL/NTSC/SECAM Video
Bandwidth	0 ~ 75MHz
Surge Protection	2KV Per: IEC61000-4-5
ESD	Level 3,1a Contact Discharge, Level 3,1b Air Discharge
Working Temperature	-10 ~ 55°C
Storage Temperature	-40°C~85°C
Humidity (Non-condensing)	0 ~ 95%
Out Shell	ABS
Weight	18g

Application

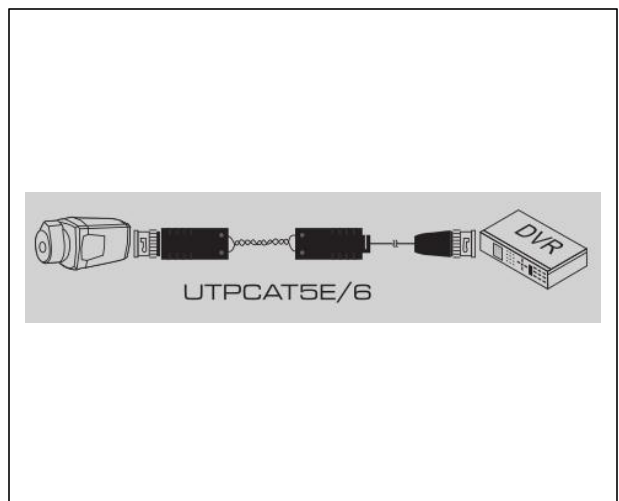

Package List

Designation	Quantity
UTP101P-HD3	2
User Manual	1

Related Products

Designation	Model
Passive Analog HD-Video UTP Transceiver	UTP101P-HD1
Passive Analog HD-Video UTP Transceiver	UTP101P-HD2
Passive Analog HD-Video UTP Transceiver	UTP101P-HD4